

Smart Power

Featuring Outlet Metering and Control

- Modular Design for flexible receptacle configurations
- Outlet Level Control and Metering
- Accuracy +/- 1% Full Load; kWh, kVa, PF, Amps and Voltage to the outlet and circuit
- Aluminum Chassis for efficient heat transfer and grounding
- Available Zero U and Rackmount MMP chassis
- Easy to Read Color Display
- HTTPs, SNMPv3s, SSL and IPv6 Support
- Audible and Visual Alarms
- Two Sensor Ports for External Sensors
- Made in the USA




The Modular MMP Series provides outlet level metering and control. The modularity of the MMP sets the standard for output receptacle flexibility.

Metering includes AMPs, Voltage, Active and Apparent Power and Power Factor. Power Factor is a great indicator of the health and condition of connected power supplies.

The MMP Series is available with or without the controlled outlet feature.



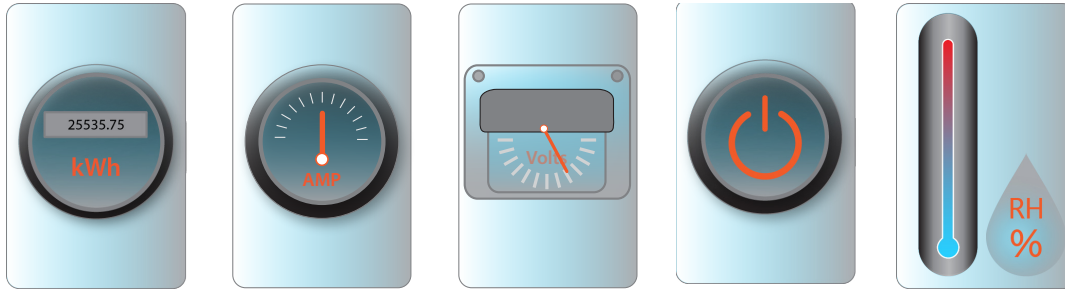

Vertical (ZeroU)

MODEL	Voltage	Input-Amps	kW	Plug Type	Recept Qty	Receptacles	Dual Pole Breakers	Size
MMP16.32.228-05	120V	30A	2.9 kW	NEMA L5-30P	10	N20(10)	2-20A	31.75" x 3.15" x 1.97"(50mm)
MMP24.32.430-05	120V	30A	2.9 kW	NEMA L5-30P	16	N20(16)	2-20A	43.75" x 3.15" x 1.97"(50mm)
MMP14.32.428-05	120V	30A	2.9 kW	NEMA L5-30P	20	N20(20)	2-20A	48.0" x 3.15" x 1.97"(50mm)
MMP24.32.426BL-08	208V	30A	5.0 kW	NEMA L6-30P	16	C13L(12); C19(4)	2-20A	43.75" x 3.15" x 1.97"(50mm)
MMP24.32.426AL-08	208V	30A	5.0 kW	NEMA L6-30P	16	C13L(16)	2-20A	43.75" x 3.15" x 1.97"(50mm)
MMP17.32.624BL-08	208V	30A	5.0 kW	NEMA L6-30P	30	C13L(24); C19(6)	2-20A	64.5" x 3.15" x 1.97"(50mm)
MMP24.32.426AL-102	230V	32A	7.4 kW	IEC60309P (32A)	16	C13L(16)	2-16A	43.75" x 3.15" x 1.97"(50mm)
MMP14.32.424BL-102	230V	32A	7.4 kW	IEC60309P (32A)	20	C13L(16); C19(4)	2-16A	48.0" x 3.15" x 1.97"(50mm)
MMP17.32.624BL-102	230V	32A	7.4 kW	IEC60309P (32A)	30	C13L(24); C19(6)	2-16A	64.5" x 3.15" x 1.97"(50mm)

Rackmount (Horizontal)

MODEL	Voltage	Input-Amps	kW	Plug Type	Recept Qty	Receptacles	Dual Pole Breakers	Size
MMP100.23.258-03	120V	20A	1.9 kW	NEMA 5-20P	8	N20(8)	1-20A	16.72" x 7.145" x 1.72"
MMP105.34.458-05	120V	30A	2.9 kW	NEMA L5-30P	16	N20(16)	2-20A	16.72" x 7.145" x 3.470"
MMP100.23.259BL-07	208V	20A	3.3 kW	NEMA L6-20P	8	C13L(6); C19(2)	1-20A	16.72" x 7.145" x 1.72"
MMP100.23.159AL.159BL-07	208V	20A	3.3 kW	NEMA L6-20P	8	C13L(7); C19(1)	1-20A	16.72" x 7.145" x 1.72"
MMP100.23.259AL-07	208V	20A	3.3 kW	NEMA L6-20P	8	C13L(8)	1-20A	16.72" x 7.145" x 1.72"
MMP105.34.459BL-08	208V	30A	5.0 kW	NEMA L6-30P	16	C13L(12); C19(4)	2-20A	16.72" x 7.145" x 3.470"
MMP105.34.259AL.259BL-08	208V	30A	5.0 kW	NEMA L6-30P	16	C13L(14); C19(2)	2-20A	16.72" x 7.145" x 3.470"
MMP105.34.459AL-08	208V	30A	5.0 kW	NEMA L6-30P	16	C13L(16)	2-20A	16.72" x 7.145" x 3.470"
MMP100.23.259BL-10	230V	16A	3.7 kW	IEC60309P (16A)	8	C13L(6); C19(2)	1-16A	16.72" x 7.145" x 1.72"
MMP100.23.159AL.159BL-10	230V	16A	3.7 kW	IEC60309P (16A)	8	C13L(7); C19(1)	1-16A	16.72" x 7.145" x 1.72"
MMP100.23.259AL-10	230V	16A	3.7 kW	IEC60309P (16A)	8	C13L(8)	1-16A	16.72" x 7.145" x 1.72"
MMP105.34.459BL-102	230V	32A	7.4 kW	IEC60309P (32A)	16	C13L(12); C19(4)	2-16A	16.72" x 7.145" x 3.470"
MMP105.34.259AL.259BL-102	230V	32A	7.4 kW	IEC60309P (32A)	16	C13L(14); C19(2)	2-16A	16.72" x 7.145" x 3.470"

Above are the most popular configurations. For different input plug types, user interface or receptacle configurations please contact a BayTech representative.

Bay Technical Associates Inc 5239 A Ave Long Beach, MS 39560 Toll Free: 800-523-2702 Intl: 228-563-7334