

Smart Power

Featuring Outlet Control and Branch Circuit Metering

- Modular Design for flexible receptacle configurations
- Outlet Level Control and Circuit Metering
- Accuracy +/- 1% Full Load; kWh, kVa, PF, Amps and Voltage to the outlet and circuit
- Aluminum Chassis for efficient heat transfer and grounding
- Available Zero U and Rackmount MRP chassis
- Easy to Read Color Display
- HTTPs, SNMPv3s, SSL and IPv6 Support
- Audible and Visual Alarms
- Two Sensor Ports for External Sensors
- Made in the USA




The Modular MRP Series provides outlet level control and Branch Circuit Metering. The modularity of the MRP sets the standard for output receptacle flexibility.

Metering includes AMPs, Voltage, Active and Apparent Power and Power Factor. Power Factor is a great indicator of the health and condition of connected power supplies.

The MRP Series is available with the controlled outlet feature.



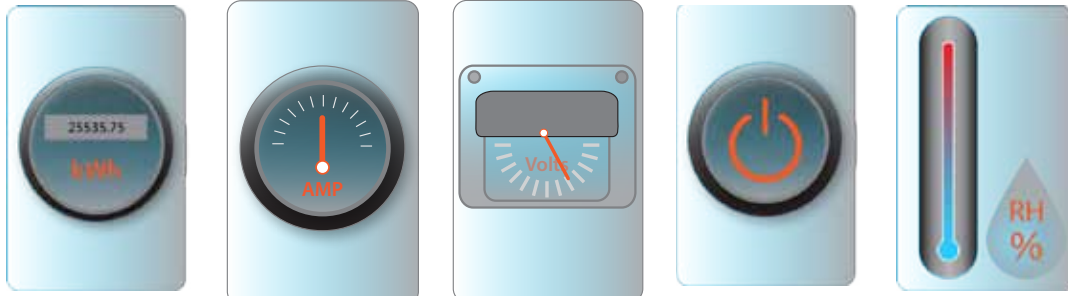

Vertical (ZeroU)

MODEL	Voltage	Input-Amps	kW	Plug Type	Recept Qty	Receptacles	Dual Pole Breakers	Size
MRP21.32.664AL-34	208V 3ØΔ	30A	8.6 kW	NEMA L21-30P	24	C13L(18); C19(6)	3-20A	54.0" x 3.15" x 1.97"(50mm)
MRP11.32.614BL-34	208V 3ØΔ	30A	8.6 kW	NEMA L21-30P	30	C13L(24); C19(6)	3-20A	61.0" x 3.15" x 1.97"(50mm)
MRP21.32.662L-34	208V 3ØΔ	30A	8.6 kW	NEMA L21-30P	30	C13L(30)	3-20A	54.0" x 3.15" x 1.97"(50mm)
MRP11.32.610L-34	208V 3ØΔ	30A	8.6 kW	NEMA L21-30P	36	C13L(36)	3-20A	61.0" x 3.15" x 1.97"(50mm)
MRP20.32.664AL-18	208V 3ØΔ	50A	14.4 kW	CS8365CP	24	C13L(18); C19(6)	6-20A	59.5" x 3.40" x 1.97"(50mm)
MRP10.32.614BL-18	208V 3ØΔ	50A	14.4 kW	CS8365CP	30	C13L(24); C19(6)	6-20A	66.5" x 3.40" x 1.97"(50mm)
MRP20.32.662L-18	208V 3ØΔ	50A	14.4 kW	CS8365CP	30	C13L(30)	6-20A	59.5" x 3.40" x 1.97"(50mm)
MRP10.32.610L-18	208V 3ØΔ	50A	14.4 kW	CS8365CP	36	C13L(36)	6-20A	66.5" x 3.40" x 1.97"(50mm)
MRP20.32.664AL-12	208V 3ØΔ	60A	17.3 kW	IEC60309P (60A)	24	C13L(18); C19(6)	6-20A	59.5" x 3.40" x 1.97"(50mm)
MRP10.32.614BL-12	208V 3ØΔ	60A	17.3 kW	IEC60309P (60A)	30	C13L(24); C19(6)	6-20A	66.5" x 3.40" x 1.97"(50mm)
MRP20.32.662L-12	208V 3ØΔ	60A	17.3 kW	IEC60309P (60A)	30	C13L(30)	6-20A	59.5" x 3.40" x 1.97"(50mm)
MRP10.32.610L-12	208V 3ØΔ	60A	17.3 kW	IEC60309P (60A)	36	C13L(36)	6-20A	66.5" x 3.40" x 1.97"(50mm)
MRP20.32.664AL-101	230/400V 3ØY	32A	22.1 kW	IEC60309P (32A)	24	C13L(18); C19(6)	6-16A	59.5" x 3.15" x 1.97"(50mm)
MRP10.32.614BL-101	230/400V 3ØY	32A	22.1 kW	IEC60309P (32A)	30	C13L(24); C19(6)	6-16A	66.5" x 3.15" x 1.97"(50mm)
MRP20.32.662L-101	230/400V 3ØY	32A	22.1 kW	IEC60309P (32A)	30	C13L(30)	6-16A	59.5" x 3.15" x 1.97"(50mm)
MRP10.32.610L-101	230/400V 3ØY	32A	22.1 kW	IEC60309P (32A)	36	C13L(36)	6-16A	66.5" x 3.15" x 1.97"(50mm)

Rackmount (Horizontal)

MODEL	Voltage	Input-Amps	kW	Plug Type	Recept Qty	Receptacles	Dual Pole Breakers	Size
MRP102.34.356L-34	208V 3ØΔ	30A	8.6 kW	NEMA L21-30P	12	C13L(12)	3-20A	16.72" x 7.145" x 3.470"

Above are the most popular configurations. For different input plug types, user interface or receptacle configurations please contact a BayTech representative.

Bay Technical Associates Inc 5239 A Ave Long Beach, MS 39560 Toll Free: 800-523-2702 Intl: 228-563-7334