

Smart Power

Featuring Outlet Control and Branch Circuit Metering

- Modular Design for flexible receptacle configurations
- Outlet Level Control and Circuit Metering
- Accuracy +/- 1% Full Load; kWh, kVa, PF, Amps and Voltage to the outlet and circuit
- Aluminum Chassis for efficient heat transfer and grounding
- Available Zero U and Rackmount MRP chassis
- Easy to Read Color Display
- HTTPs, SNMPv3s, SSL and IPv6 Support
- Audible and Visual Alarms
- Two Sensor Ports for External Sensors
- Made in the USA




The Modular MRP Series provides outlet level control and Branch Circuit Metering. The modularity of the MRP sets the standard for output receptacle flexibility.

Metering includes AMPs, Voltage, Active and Apparent Power and Power Factor. Power Factor is a great indicator of the health and condition of connected power supplies.

The MRP Series is available with the controlled outlet feature.



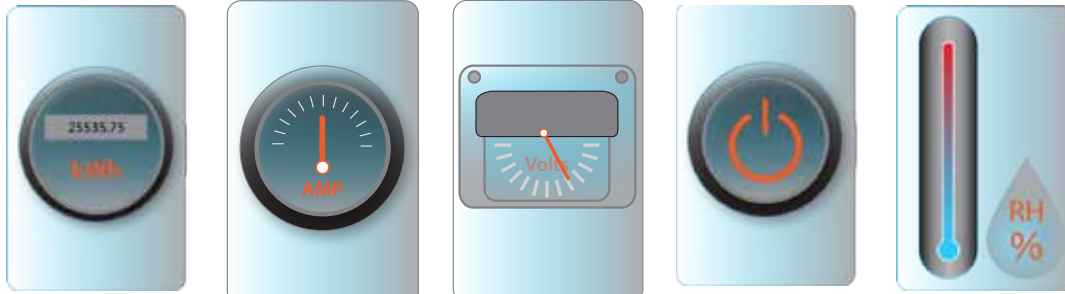

Vertical (ZeroU)

MODEL	Voltage	Input-Amps	kW	Plug Type	Recept Qty	Receptacles	Dual Pole Breakers	Size
MRP16.32.212-05	120V	30A	2.9 kW	NEMA L5-30P	12	N20(12)	2-20A	29.75" x 3.15" x 1.97"(50mm)
MRP24.32.436-05	120V	30A	2.9 kW	NEMA L5-30P	20	N20(20)	2-20A	40.5" x 3.15" x 1.97"(50mm)
MRP14.32.444-05	120V	30A	2.9 kW	NEMA L5-30P	24	N20(24)	2-20A	44.5" x 3.15" x 1.97"(50mm)
MRP24.32.464AL-08	208V	30A	5.0 kW	NEMA L6-30P	16	C13L(12); C19(4)	2-20A	40.5" x 3.15" x 1.97"(50mm)
MRP24.32.462AL-08	208V	30A	5.0 kW	NEMA L6-30P	16	C13L(16)	2-20A	40.5" x 3.15" x 1.97"(50mm)
MRP17.32.614BL-08	208V	30A	5.0 kW	NEMA L6-30P	30	C13L(24); C19(6)	2-20A	59.5" x 3.15" x 1.97"(50mm)
MRP24.32.462AL-102	230V	32A	7.4 kW	IEC60309P (32A)	16	C13L(16)	2-16A	40.5" x 3.15" x 1.97"(50mm)
MRP14.32.414BL-102	230V	32A	7.4 kW	IEC60309P (32A)	20	C13L(16); C19(4)	2-16A	44.5" x 3.15" x 1.97"(50mm)
MRP17.32.614BL-102	230V	32A	7.4 kW	IEC60309P (32A)	30	C13L(24); C19(6)	2-16A	59.5" x 3.15" x 1.97"(50mm)

Rackmount (Horizontal)

MODEL	Voltage	Input-Amps	kW	Plug Type	Recept Qty	Receptacles	Dual Pole Breakers	Size
MRP100B.23A.273-03	120V	20A	1.9 kW	NEMA 5-20P	8	N20(8)	1-20A	16.72" x 7.145" x 1.72"
MRP100A.23A.254-03	120V	20A	1.9 kW	NEMA 5-20P	10	N20(10)	1-20A	16.72" x 7.145" x 1.72"
MRP105B.34A.473-05	120V	30A	2.9 kW	NEMA L5-30P	16	N20(16)	2-20A	16.72" x 7.145" x 3.470"
MRP105A.34A.454-05	120V	30A	2.9 kW	NEMA L5-30P	20	N20(20)	2-20A	16.72" x 7.145" x 3.470"
MRP100A.23A.256L-07	208V	20A	3.3 kW	NEMA L6-20P	8	C13L(8)	1-20A	16.72" x 7.145" x 1.72"
MRP105A.34A.456L-08	208V	30A	5.0 kW	NEMA L6-30P	16	C13L(16)	2-20A	16.72" x 7.145" x 3.470"
MRP100A.23A.256L-10	230V	16A	3.7 kW	IEC60309P (16A)	8	C13L(8)	1-16A	16.72" x 7.145" x 1.72"
MRP105A.34A.456L-102	230V	32A	7.4 kW	IEC60309P (32A)	16	C13L(16)	2-16A	16.72" x 7.145" x 3.470"

Above are the most popular configurations. For different input plug types, user interface or receptacle configurations please contact a BayTech representative.

Bay Technical Associates Inc 5239 A Ave Long Beach, MS 39560 Toll Free: 800-523-2702 Intl: 228-563-7334